


1214-Cylindrical nut

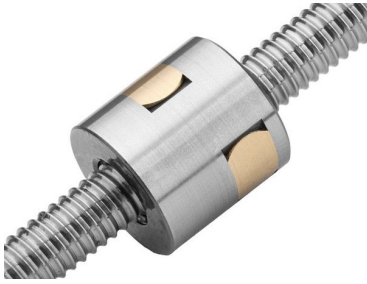

select	Inquiry Label		No. of starts	Static load capacity [kN]	Friction torque FROM [Ncm]	Friction torque TO [Ncm]	Position keyway [mm]	Width keyway [mm]	Length keyway [mm]	Depth keyway [mm]	Pilot diameter tolerance [mm]	Accuracy	Ball diameter [mm]	Ball circles	dN [mm]	P [mm]	Nominal stroke [mm]	D1 [mm]	L [mm]	Dynamic load capacity [kN]	Series	Shaft style	Thread length [mm]	Overall length [mm]	Preload/backlash free/with backlash
1214/0,5.3.44.85	3	0,5	20	7	7	0,09	1214	B	44	85	1x2	0,6	1	0,09	1,0	1,0					h6	P	backlash free		
1214/0,5.3.64.105	3	0,5	40	7	7	0,09	1214	B	64	105	1x2	0,6	1	0,09	1,0	1,0					h6	P	backlash free		
1214/0,5.3.76.90	3	0,5	50	7	7	0,09	1214	A	76	90	1x2	0,6	1	0,09	1,0	1,0					h6	P	backlash free		
1214/0,5.3.94.135	3	0,5	70	7	7	0,09	1214	B	94	135	1x2	0,6	1	0,09	1,0	1,0					h6	P	backlash free		
1214/0,5.5.125.165	5	0,5	100	12	13	0,17	1214	B	125	165	1x3	0,6	1	0,24	1,5	1,5					h6	P	backlash free		
1214/0,5.5.65.105	5	0,5	40	12	13	0,17	1214	B	65	105	1x3	0,6	1	0,24	1,5	1,5					h6	P	backlash free		
1214/0,5.5.90.110	5	0,5	60	12	13	0,17	1214	A	90	110	1x3	0,6	1	0,24	1,5	1,5					h6	P	backlash free		
1214/0,5.5.95.135	5	0,5	70	12	13	0,17	1214	B	95	135	1x3	0,6	1	0,24	1,5	1,5					h6	P	backlash free		
1214/0,5.8.110.168	8	0,5	70	15	13	0,40	1214	B	110	168	1x3	0,6	1	0,50	2,0	2,0					h6	P	backlash free		
1214/0,5.8.140.198	8	0,5	100	15	13	0,40	1214	B	140	198	1x3	0,6	1	0,50	2,0	2,0					h6	P	backlash free		
1214/0,5.8.145.170	8	0,5	100	15	13	0,40	1214	A	145	170	1x3	0,6	1	0,50	2,0	2,0					h6	P	backlash free		
1214/0,5.8.190.248	8	0,5	150	15	13	0,40	1214	B	190	248	1x3	0,6	1	0,50	2,0	2,0					h6	P	backlash free		
1214/0,5.8.245.270	8	0,5	200	15	13	0,40	1214	A	245	270	1x3	0,6	1	0,50	2,0	2,0					h6	P	backlash free		
1214/0,5.8.80.138	8	0,5	40	15	13	0,40	1214	B	80	138	1x3	0,6	1	0,50	2,0	2,0					h6	P	backlash free		
1214/2.6.125.165	6	2	100	12	13	0,71	1214	B	125	165	1x3	1	1	1,08	1,5	1,5					h6	P	backlash free		
1214/2.6.65.105	6	2	40	12	13	0,71	1214	B	65	105	1x3	1	1	1,08	1,5	1,5					h6	P	backlash free		
1214/2.6.90.110	6	2	60	12	13	0,71	1214	A	90	110	1x3	1	1	1,08	1,5	1,5					h6	P	backlash free		
1214/2.6.95.135	6	2	70	12	13	0,71	1214	B	95	135	1x3	1	1	1,08	1,5	1,5					h6	P	backlash free		
1214/1.12.110.180	12	1	50	19	17	1,10	1214	B	110	180	1x3	0,8	1	2,00	3,0	3,0	2,5	5	16	1,9	h6	P	backlash free		
1214/1.12.160.230	12	1	100	19	17	1,10	1214	B	160	230	1x3	0,8	1	2,00	3,0	3,0	2,5	5	16	1,9	h6	P	backlash free		
1214/1.12.210.280	12	1	150	19	17	1,10	1214	B	210	280	1x3	0,8	1	2,00	3,0	3,0	2,5	5	16	1,9	h6	P	backlash free		
1214/1.12.260.330	12	1	200	19	17	1,10	1214	B	260	330	1x3	0,8	1	2,00	3,0	3,0	2,5	5	16	1,9	h6	P	backlash free		
1214/1.12.310.380	12	1	250	19	17	1,10	1214	B	310	380	1x3	0,8	1	2,00	3,0	3,0	2,5	5	16	1,9	h6	P	backlash free		
1214/1.12.355.397	12	1	300	19	17	1,10	1214	A	355	397	1x3	0,8	1	2,00	3,0	3,0	2,5	5	16	1,9	h6	P	backlash free		
1214/1.12.410.480	12	1	350	19	17	1,10	1214	B	410	480	1x3	0,8	1	2,00	3,0	3,0	2,5	5	16	1,9	h6	P	backlash free		
1214/1.12.510.580	12	1	450	19	17	1,10	1214	B	510	580	1x3	0,8	1	2,00	3,0	3,0	2,5	5	16	1,9	h6	P	backlash free		
1214/1.3.44.85	3	1	20	7	7	0,24	1214	B	44	85	1x2	0,8	1	0,25	1,0	1,0					h6	P	backlash free		
1214/1.3.64.105	3	1	40	7	7	0,24	1214	B	64	105	1x2	0,8	1	0,25	1,0	1,0					h6	P	backlash free		
1214/1.3.76.90	3	1	50	7	7	0,24	1214	A	76	90	1x2	0,8	1	0,25	1,0	1,0					h6	P	backlash free		
1214/1.3.94.135	3	1	70	7	7	0,24	1214	B	94	135	1x2	0,8	1	0,25	1,0	1,0					h6	P	backlash free		